




Hinges





Hinges



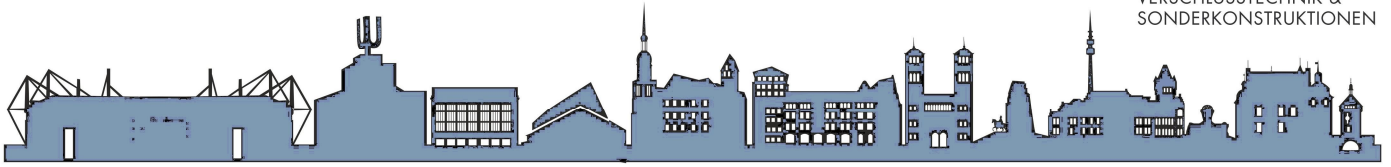


Hinges

Materials and surface finishes:

.00	Raw steel
.01	Nickel-plated
.02	Brassed
.03	Chromated
.04	Zinc plated steel
.05	Bronzed
.06	Black zinc plated
.07	Blued
.08	Yellow chromated
.09	EPD (Electrophoretic deposition)
.10	Anodized silver-coloured
.20	Raw Brass
.22	Polished Brass
.23	Chromated Brass
.30	Raw stainless steel (1.4301)
.33	Polished stainless steel
.35	Raw stainless steel (1.4401)
.50	Raw Zamak (zinc aluminium magnesium copper)
.70	Raw aluminium
.80	Raw polyamide

Ordering example:

Art.no 6001. 01/02. 04/30

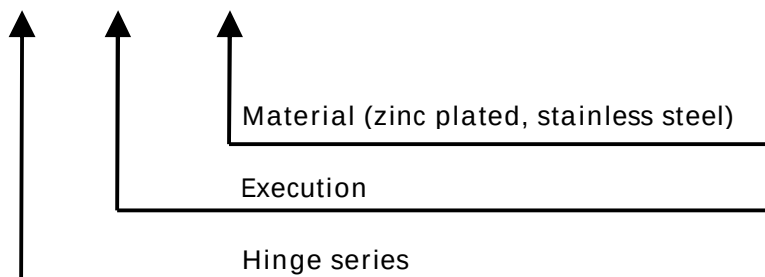


Hinges

Art. no.: 6001

with extractable pin


Article no.			Dimensions in mm				
Series	Execution	Material	A	B	D	S	Pin Ø
		Raw Steel					
6001	.01	.00	40	40	8	2	4
6001	.02	.00	50	50	10	2	6
6001	.03	.00	60	60	10	2	6
6001	.04	.00	70	70	10	2	6

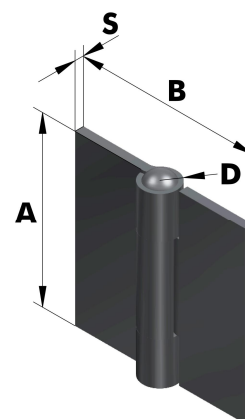

Art. no.: 6002

with riveted pin


Article no.					Dimensions in mm					
Series	Execution	Material			A	B	D	E	S	Pin Ø
		Raw								
		Steel	Stainless steel	Stainless steel						
6002	.01	.00	.30	.35	40	40	8	4	2	4
6002	.02	.00	.30	.35	50	50	10	5	2	6
6002	.03	.00	.30	.35	60	60	10	5	2	6
6002	.04	.00	.30	-	70	70	10	5	2	6
6002	.05	.00	.30	-	80	80	11	5,5	2,5	6
6002	.06	.00	.30	-	100	100	11	5,5	2,5	6

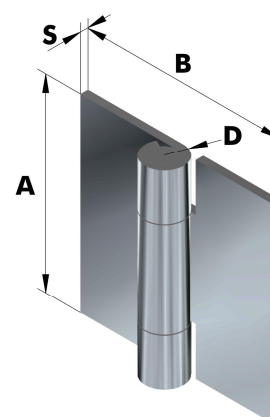

Art. no.: 6002 (drilled and countersunk)

with riveted pin


Article no.				Dimensions in mm							
Series	Execution	Material		A	B	C Ø	D	F	G	S	Pin Ø
		Raw									
		Stainless steel	Stainless steel								
6002	.07	.30	.35	40	40	4	8	24	24	2	4
6002	.08	.30	.35	50	50	4,5	10	34	34	2	6
6002	.09	.30	.35	60	60	4.5	10	44	40	2	6

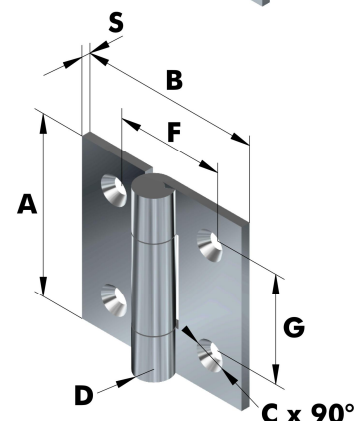

Art. no.: 6002 (drilled and countersunk)

with riveted pin


Article no.			Dimensions in mm									
Series	Execution	Material	A	B	C Ø	D	F	f	G	S	Pin Ø	
		Raw										
		Stainless steel										
6002	.10	.30	70	70	4,5	10	54	34	50	2	6	
6002	.11	.30	80	80	4.5	11	64	39	60	2.5	6	

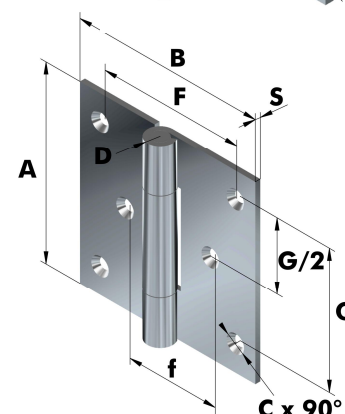

Hinges


Art. no.: 6003 (drilled and countersunk)
with extractable pin

Article no.				Dimensions in mm							
Series	Execution	Material		A	B	C Ø	D	F	G	S	Pin Ø
		Zinc plated	Raw								
		Steel	Stainless steel								
6003	.01	.04	.30	40	40	4	8	26	24	2	4
6003	.02	.04	.30	50	50	4.5	10	34	34	2	6
6003	.03	.04	.30	60	60	4.5	10	44	40	2	6




Art. no.: 6004 (drilled and countersunk)
with extractable pin

Article no.				Dimensions in mm								
Series	Execution	Material		A	B	C Ø	D	F	f	G	S	Pin Ø
		Zinc plated	Raw									
		Steel	Stainless steel									
6004	.01	.04	.30	70	70	4	10	54	34	50	2	6
6004	.02	.04	.30	80	80	4,5	11	64	39	60	2,5	6

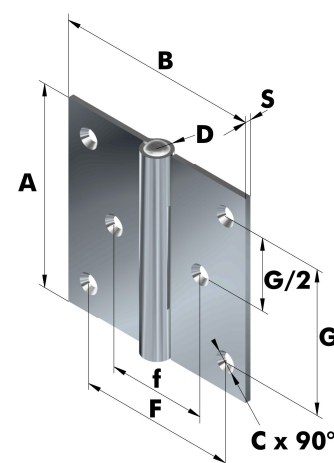


Art. no.: 6005 (drilled and countersunk)
with riveted pin

Article no.				Dimensions in mm							
Series	Execution	Material		A	B	C Ø	D	F	G	S	Pin Ø
		Raw									
		Stainless steel	Stainless steel								
6005	.01	.30	.35	40	40	4	8	24	24	2	4
6005	.02	.30	.35	50	50	4,5	10	34	34	2	6
6005	.03	.30	.35	60	60	4.5	10	44	40	2	6

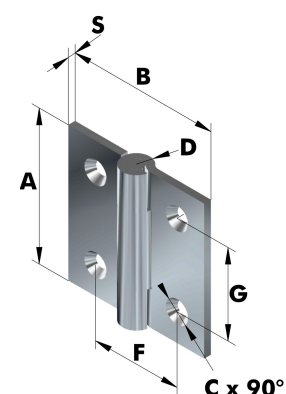

Art. no.: 6006 (drilled and countersunk)
with riveted pin


Article no.				Dimensions in mm								
Series	Execution	Material		A	B	C Ø	D	F	f	G	S	Pin Ø
		Raw	Zinc plated									
		Stainless steel	Steel									
6006	.01	.30	-	70	70	4,5	10	54	34	50	2	6
6006	.02	.30	-	80	80	4,5	11	64	39	60	2,5	6
6006	.04	-	.04	100	84	5.5	-	55	42	79	3	6

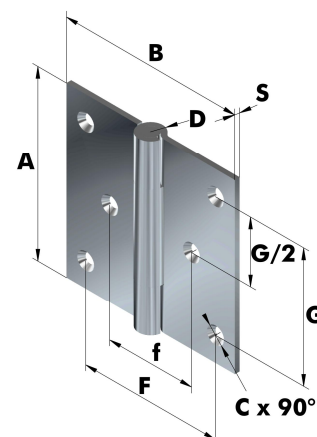

Hinges


Art. no.: 6007 (drilled and countersunk)
with fixed pin

Article no.				Dimensions in mm							
Series	Execution	Material		A	B	C Ø	D	F	G	S	Pin Ø
		Zinc plated	Raw								
		Steel	Stainless steel								
6007	.01-drilled	.04	.30	50	40	5	3,1	23	36	1,2	2,7
6007	.02-sunk	.04	.30	50	40	5	3,1	23	36	1,2	2,7
6007	.03-sunk	-	.30	60	35	4	2	19,5	40	1	1
6007	.04-sunk	-	.30	60	35	4	2	19,5	40	1	1

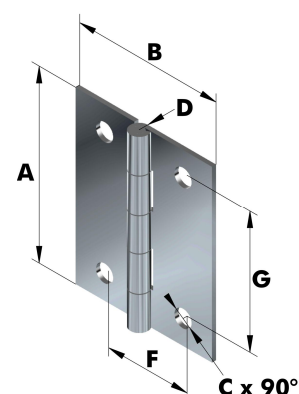


Art. no.: 6008
with riveted pin

Article no.			
Series	Execution	Material	
		Raw	Steel
		Steel	Stainless steel
6008	.01	.00	




Art. no.: 6009 (drilled and countersunk)
with fixed pin and nylon transitional ring

Article no.			
Series	Execution	Material	
		Raw	Steel
		Steel	Stainless steel
6009	.01	.30	

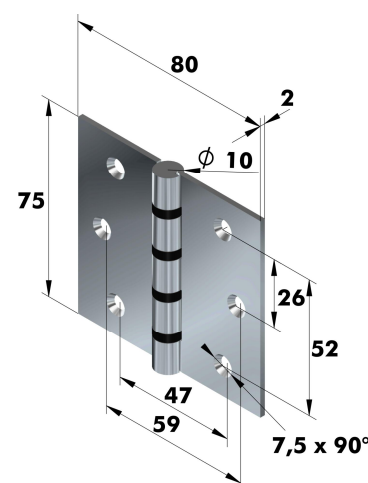

Art. no.: 6010 (drilled and countersunk)
with fixed pin

Article no.				Dimensions in mm							
Series	Execution	Material		A	B	C Ø	D	F	G	S	Pin Ø
		Zinc plated	Raw								
		Steel	Stainless steel								
6010	.01	.00	-	30	19	2	4	11	19	0,8	2,4
6010	.02	.00	-	35	22	2,5	4	14	22	0,8	2,4
6010	.03	.00	-	40	25	2,5	4,5	15	27	0,9	2,7
6010	.04	-	.30	50	30	3,5	5	17	35	1	3
6010	.05	.00	-	50,3	29,8	2,5	4,4	15,4	35,2	1	2,4

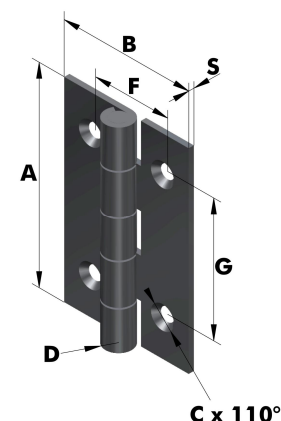


Hinges

Art. no.: 6010

with fixed steel pin


Article no.			Dimensions in mm				
Series	Execution	Material	A	B	D	S	Pin Ø
		Raw Steel					
6010	.06	.00	30	19	4	0,8	2,4
6010	.07	.00	35	22	4	0,8	2,4
6010	.08	.00	40	25	4,5	0,9	2,7
6010	.10	.00	50,3	29,8	4,4	1	2,4



Art. no.: 6011 (drilled and countersunk)

with fixed steel pin


Article no.			Dimensions in mm							
Series	Execution	Material	A	B	C Ø	D	F	G	S	Pin Ø
		Raw Steel								
6011	.01	.00	60	35	2,5	5	19	44	1	3
6011	.02	.00	70	41,5	3	5,5	24,1	52	1	3,5
6011	.03	.00	80,5	45,4	4	5,5	26,2	59,3	1	3,5
6011	.04	.00	100	50	4,5	7,9	30	77	1,5	4,9

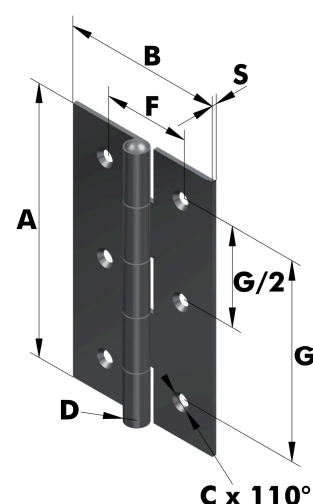

Art. no.: 6011

with fixed steel pin, drills on inquiry


Article no.			Dimensions in mm				
Series	Execution	Material	A	B	D	S	Pin Ø
		Raw Steel					
6011	.05	.00	60	35	5	1	3
6011	.06	.00	70	41,5	5,5	1	3,5
6011	.08	.00	100	50	7,9	1,5	4,9

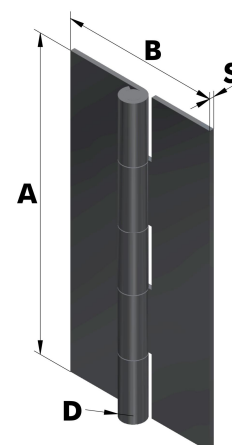

Art. no.: 6013

with fixed pin, drilled and countersunk


Article no.			Dimensions in mm							
Series	Execution	Material	A	B	C Ø	D	F	f	S	Pin Ø
		Raw								
		Steel								
6013	.01	.00	20	77	3	5,6	60	28	1,2	3
6013	.02	.00	22	120	4	8	93	33	1.5	4.9

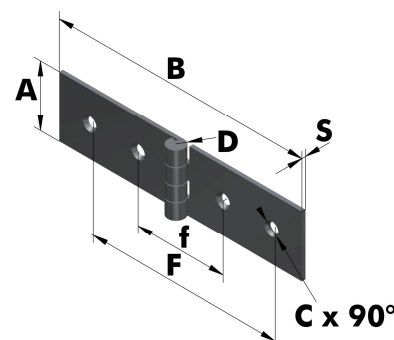

Hinges


Art. no.: 6016 (drilled and countersunk)
with fixed pin

Article no.		
Series	Execution	Material
		Raw
6016	.01	Steel
		.00

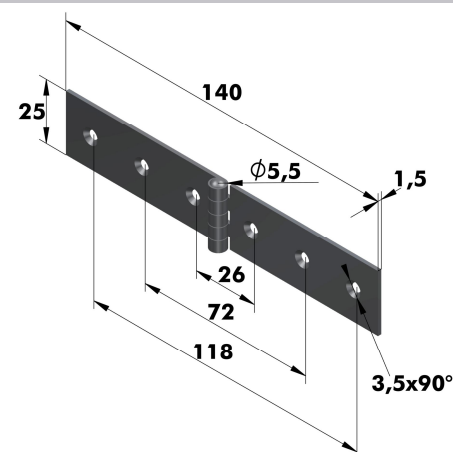


Art.Nr.: 6017 (perforated and countersunk)

Article no.		
Series	Execution	Material
		Raw
6017	.01	Stainless steel
		.30

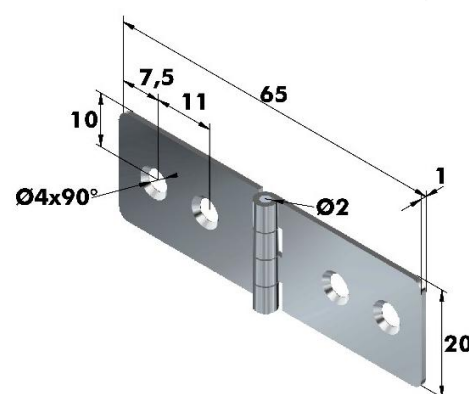


Art. no.: 6052 (perforated and countersunk)
with fixed pin
Stop at 60°
Suitable for the installation of glass doors.

Article no.		
Series	Execution	Material
		Polished
6052	.01	Stainless steel
		.33

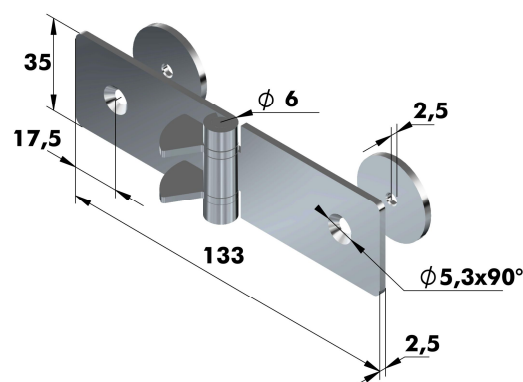

Art. no.: 6058
Stop hinge with locking by 105°
with fixed pin (Ø5)


Article no.		
Series	Execution	Material
		Raw
6058	.04	Stainless steel
		.30

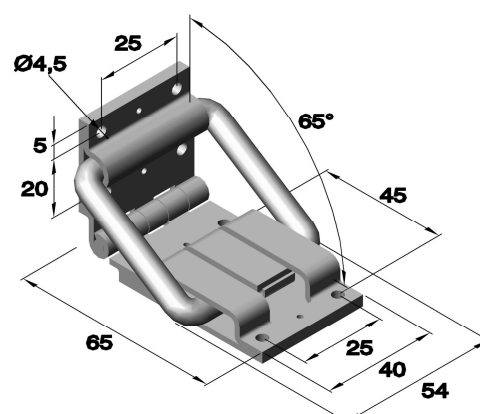

Hinges


Art. no.: 6018 (drilled and countersunk)
with fixed stainless-steel pin

Article no.			Dimensions in mm							
Series	Execution	Material	A	B	C Ø	D	F	G	S	Pin Ø
		Raw Brass								
6018	.03	.20	30	20	2,5	5	12,5	17	2	3
6018	.04	.20	30	30	2,5	5	19	17	2	3

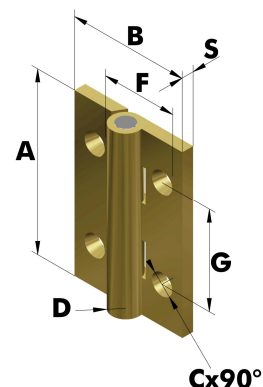


Art. no.: 6019 (drilled and countersunk)
with fixed stainless-steel pin

Article no.			Dimensions in mm								
Series	Execution	Material	A	B	C Ø	D	F	f	G	S	Pin Ø
		Raw Brass									
6019	.03	.20	40	35	3	5	21	-	28	2	3
6019	.04	.20	40	40	3	5	23	-	28	2	3
6019	.05	.20	50	30	3	5	17,5	-	35	2	3
6019	.07	.20	60	40	3,5	4,5	21,5	26	43	2	3

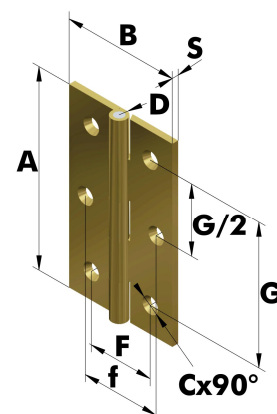

Art. no.: 6020 (drilled and countersunk)
with fixed stainless-steel pin


Article no.			Dimensions in mm								
Series	Execution	Material	A	B	C Ø	D	F	f	G	S	Pin Ø
		Raw Brass									
6020	.01	.20	70	40	3,5	5,5	23	27	48	2	3
6020	.02	.20	70	50	3,5	6,5	25	37	48	2,5	3,5
6020	.03	.20	80	45	3,5	5,5	22,5	30,5	58	2,2	3
6020	.04	.20	80	60	4	7	28	45	57	3	4

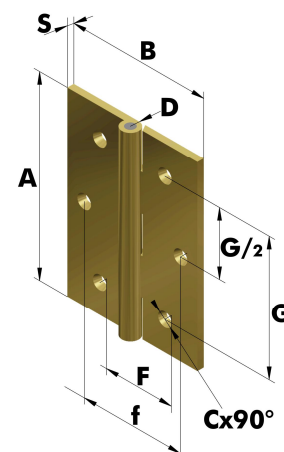

Hinges


Art. no.: 6025 (perforated and countersunk)
with fixed stainless-steel pin

Article no.		
Series	Execution	Material
		Chromated
6025	.01	Brass
		.23

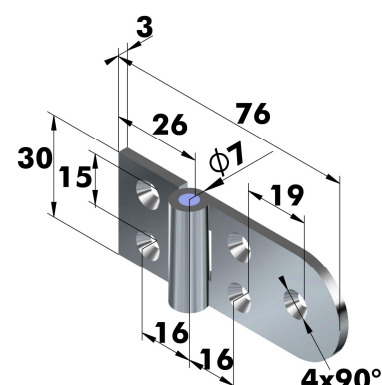


Art. no.: 6027 (perforated and countersunk)
with fixed stainless-steel pin

Article no.		
Series	Execution	Material
		Chromated
6027	.01	Brass
		.23

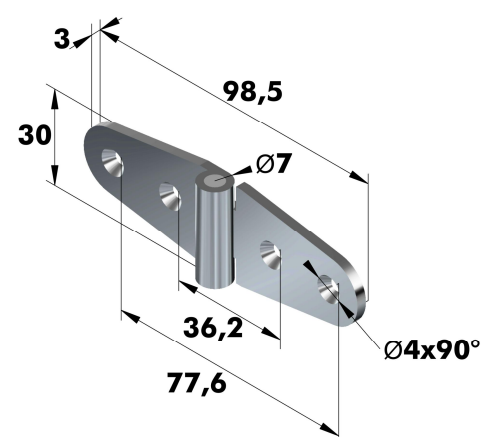

Art. no.: 6028 (perforated and countersunk)
with fixed stainless-steel pin


Article no.		
Series	Execution	Material
		Chromated
6028	.01	Brass
		.23

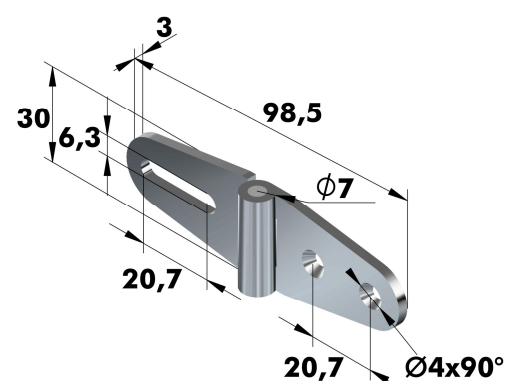

Art. no.: 6029 (perforated and countersunk)

Suitable to art. no.: 6026/6028

Article no.		
Series	Execution	Material
		Chromated
6029	.01	Brass
		.23



Art. no.: 6044 (perforated and countersunk)
with fixed pin


Art. no.: 6046 (perforated and countersunk)
with fixed pin

Art. no.: 6047
with fixed pin

Art. no.: 6048
with fixed pin

Stainless steel (1.4301) on inquiry


Article no.			
Series	Execution	Material	
		Raw	
		Steel	Stainless steel
6048	.01	.00	.30

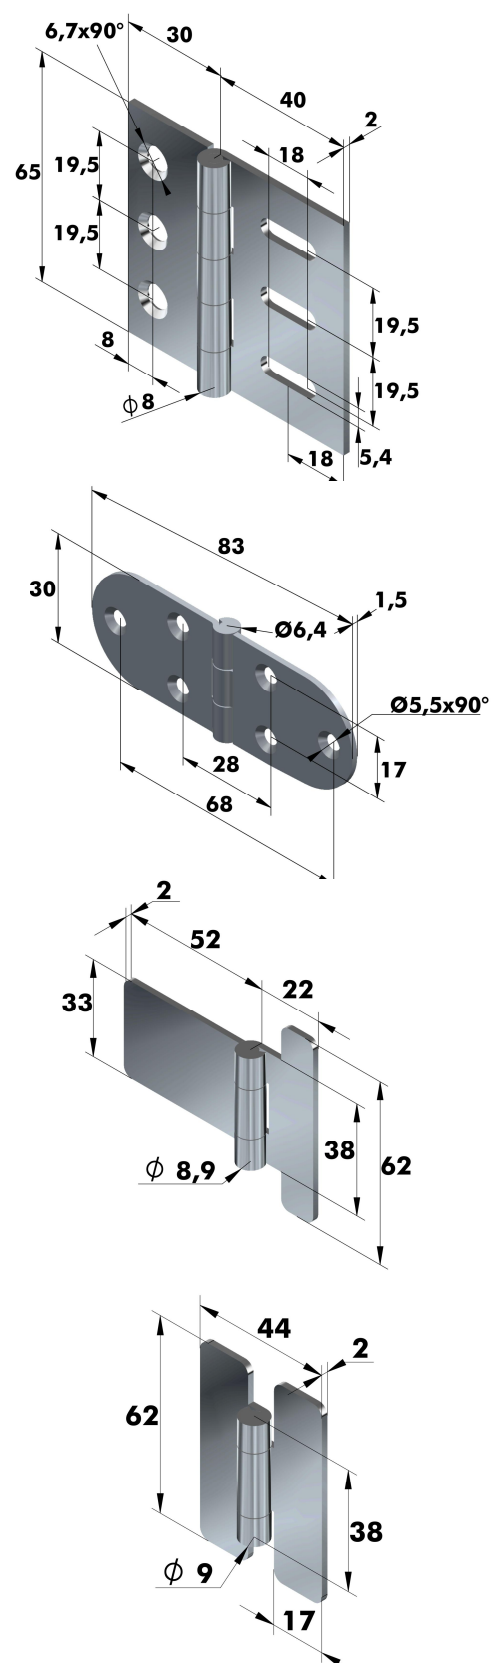

Hinges


Art. no.: 6106 (perforated)
with extractable pin

Article no.	
Series	Material
	Polished
	Stainless steel
6106	.30

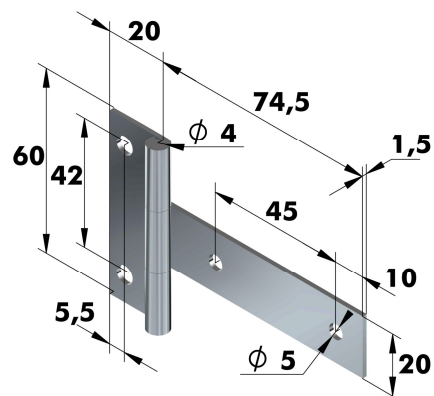


Art. no.: 6109 (perforated and countersunk)
with riveted pin

Article no.		Dimension in mm
Series	Material	Pin Ø
	Raw	
	Stainless steel	
6109	.30	3

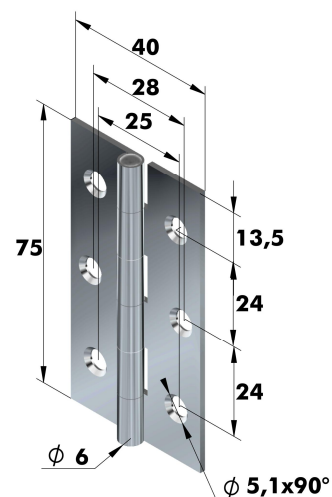

Art.no.: 99.7651 (perforated and countersunk)
with fixed pin

Article no.	
Series	Material
	Raw
	Stainless steel
99.7651	.30

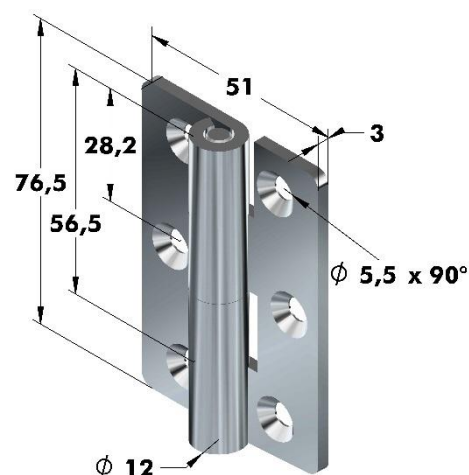


Hinges

Art.no. 6540 (drilled and countersunk)

Also available as:

Spring hinge see chapter „spring hinges“

Torque- and detent hinge see chapter „torque and detent hinges“

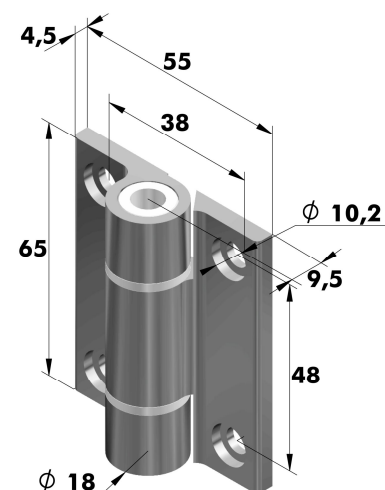


Article no.			
Series	Execution	Material	
		Aluminium 6060 T5	
		Silver	Black
6540	.01 no plug	.70	.77
6540	.02 with plug	.70	.77

Art.no. 6876 (drilled and countersunk)

Also available:

Spring hinge see chapter „spring hinges “

Torque hinges see chapter „torque and detent hinges “

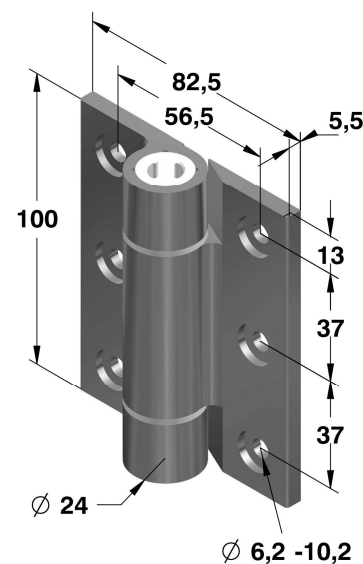


Article no.			
Series	Execution	Material	
		Aluminium 6060 T5	
		Silver	Black
6876	.08	.71	-
6876	.09	-	.77

Hinges


Art.no.: 196.5.F37.001.001 (perforated)
with fixed steel pin

Article no.	
Series	Material
	Zinc plated
196.5.F37.001.001	Steel
	.00

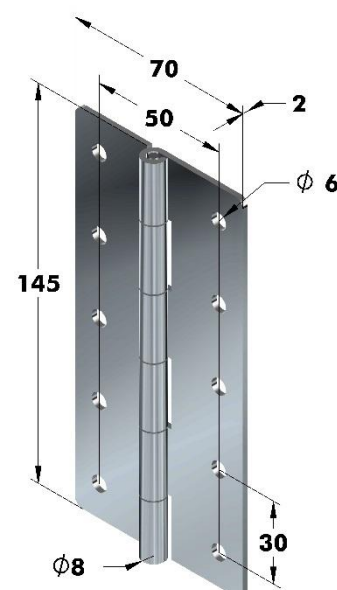


Art.no.: 196.5.F37.001.002 (perforated)
with fixed steel pin

Article no.	
Series	Material
	Zinc plated
196.5.F37.001.002	Steel
	.00

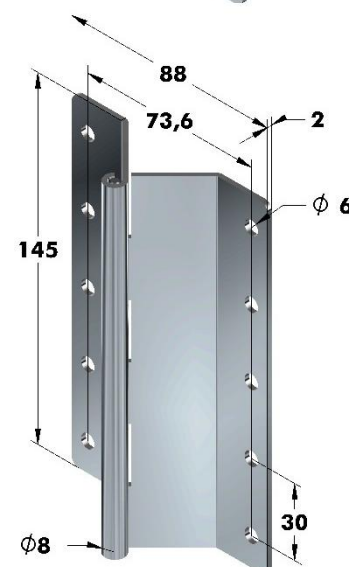

Art. no.: 6058 tubular hinge
with fixed pin

Article no.		
Series	Execution	Material
		Zinc plated yellow chromated
6058	.03	Steel
		.08

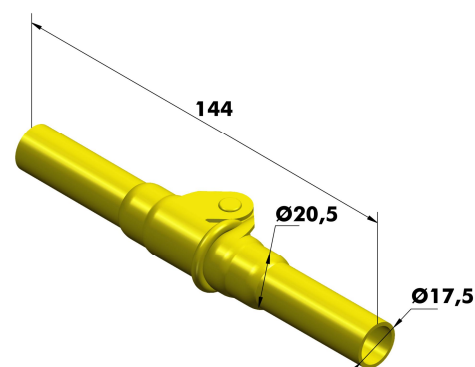


Hinges

Art.no.: **6176** (drilled and countersunk)

with riveted pin


Article no.		
Series	Execution	Material
		Polished
6176	.01	Stainless steel 1.4401
		.33

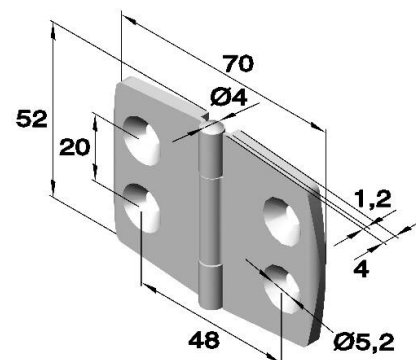

Art.no.: **6177** (drilled and countersunk)

with riveted pin


Article no.		
Series	Execution	Material
		Polished
6177	.01	Stainless steel 1.4401
		.33

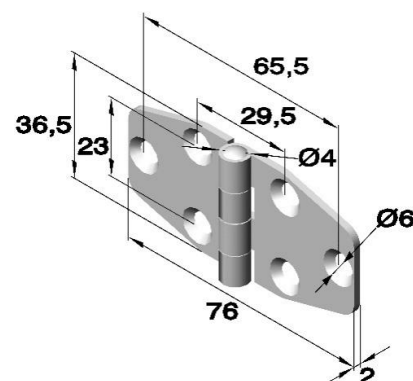

Art.no.: **6178** (drilled and countersunk)

with riveted pin


Article no.		
Series	Execution	Material
		Polished
6178	.01	Stainless steel 1.4401
		.33

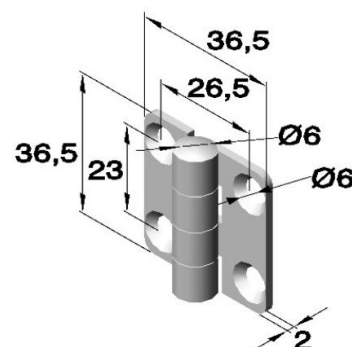

Art.no.: **6179** (drilled and countersunk)

with riveted pin


Article no.		
Series	Execution	Material
		Polished
6179	.01	Stainless steel 1.4401
		.33

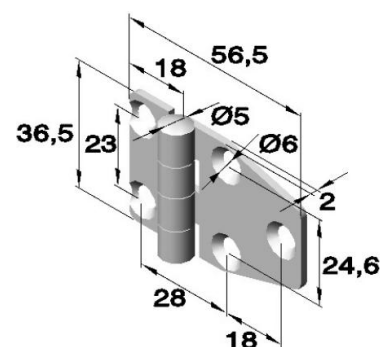

Hinges


Art.no.:6180 (drilled and countersunk)

with riveted pin

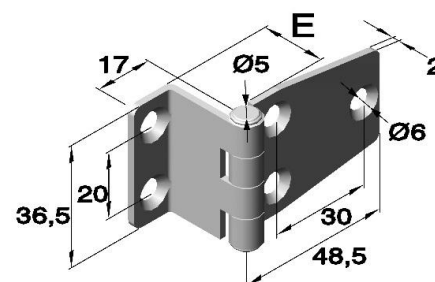

Article no.			Dimensions in mm
Series	Execution	Material	E
		Polished	
		Stainless steel 1.4401	
6180	.01	.33	10
6180	.02	.33	15,9
6180	.03	.33	19,2


Art.no.:6181 (perforated and countersunk)

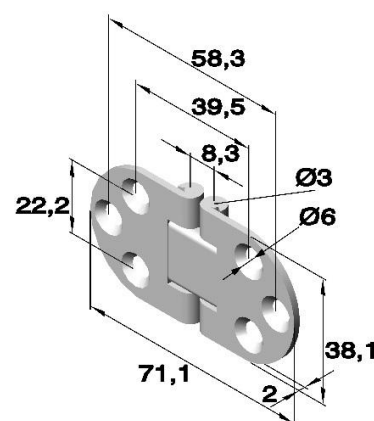

Article no.		Material
Series		Polished
		Stainless steel
		.33
6181		.33

Art.no.:6182 (perforated and countersunk)


with riveted pin

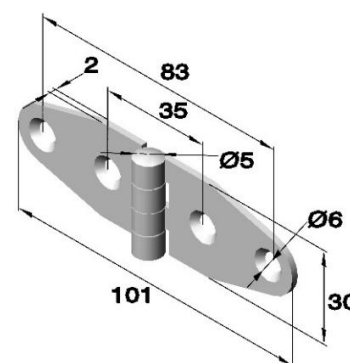

Article no.		Material
Series		Polished
		Stainless steel
		.33
6182		.33

Art.no.:6183 (perforated and countersunk)

with riveted pin

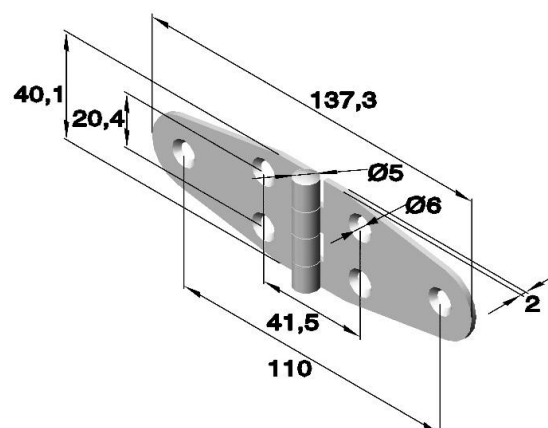


Article no.			Material
Series	Execution		Polished
			Stainless steel
			.33
6183	.01		.33

Hinges

Art.no.: **6184** (perforated and countersunk)


with riveted pin

Article no.		
Series	Execution	Material
		Polished
6184	.01	Stainless steel
		.33

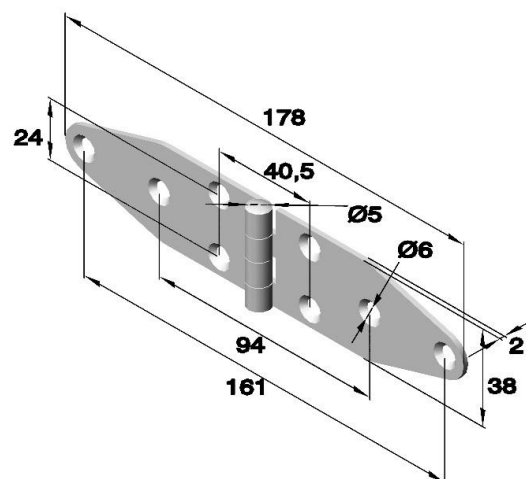

Art.no.: **6215** (perforated and countersunk)


Article no.			Dimensions in mm							
Series	Execution	Material	A	B	C	D	E	F	G	S
		Aluminium 6082 T5 Anodized								
6215	.01	.71	38	31.75	1.3	2.29	2.29	20	22	4.3
6215	.02	.71	50	44.45	1.3	2.29	2.29	30	34	4.3
6215	.03	.71	63.5	63.5	1.3	2.29	2.29	40	40	6

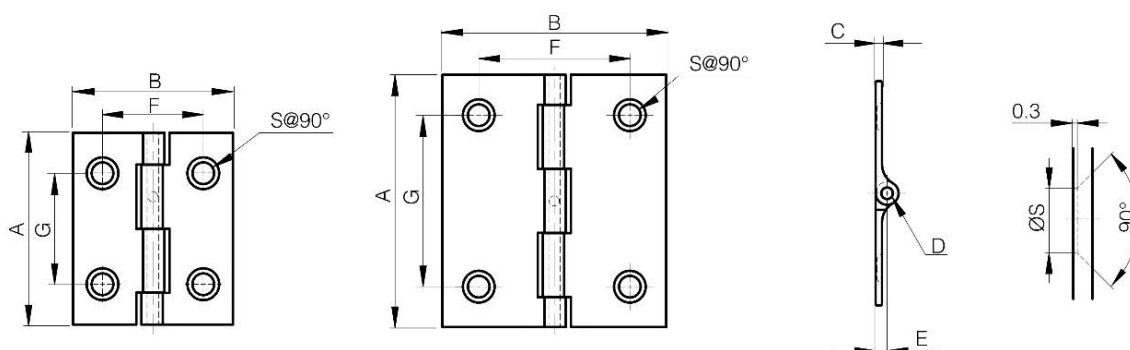

Hinges


Art.no.: 6216 (perforated and countersunk)

Article no.				Dimensions in mm			
Series	Execution	Material		A	B	C	D
		Aluminium 6060 T5 Anodized					
		Colourless	Black				
6216	.01	.71	.77	30	35	3.3	8

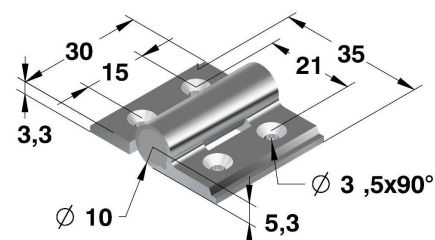


Art.no.: 6216 (drilled and countersunk)

Article no.				Pin Ø
Series	Execution	Material		
		Aluminium 6060 T5 anodized		
		Colorless	Black	
6216	02	71	77	8

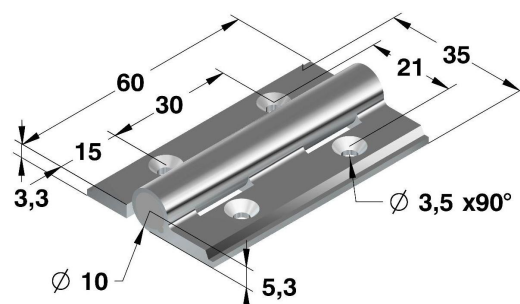


Art.no.: 6216 (drilled and countersunk)

Article no.				Pin Ø
Series	Execution	Material		
		Aluminium 6060 T5 anodized		
		Colorless	Black	
6216	03	71	77	8

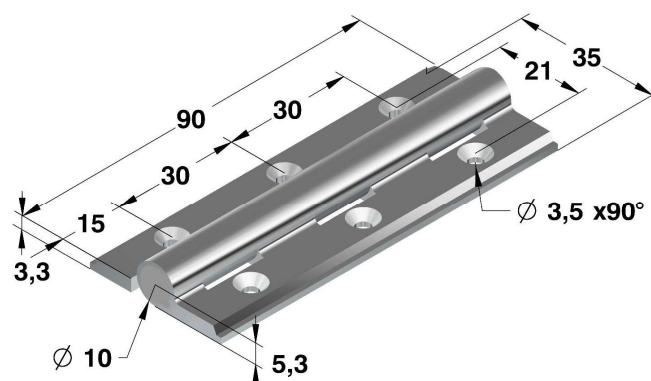

Art.no.: 6216 (drilled and countersunk)

Article no.				Pin Ø
Series	Execution	Material		
		Aluminium 6060 T5 anodized		
		Colorless	Black	
6216	04	71	77	8

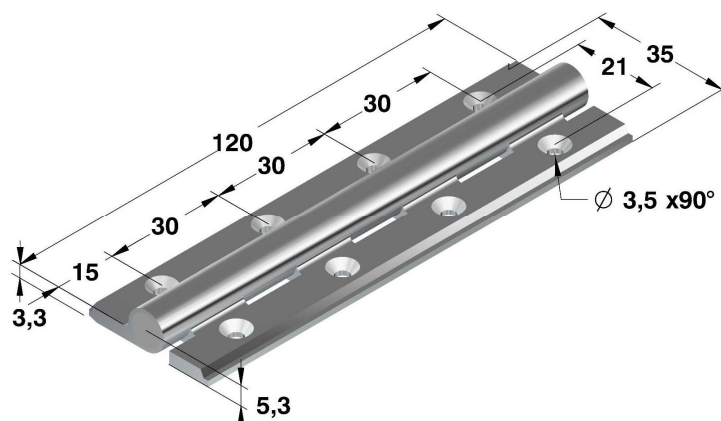

Hinges

Art. Nr.: 150. MH-30

(perforated and countersunk)

Double pivot hinge allows 180° opening

150.MH-30CR






150.MH-30M



150.MH-30WB



Article no.			Door width	Door height	Door Thickness	Load Capacity N / Pair	Weight (g)
Series	Execution	Material Brass					
150. MH-30	M (Polished)	.22	Max. 450	Max. 700	Max. 21	29	45
150. MH-30	WB (White Bronze plating)	.25					
150. MH-30	CR (Chrom)	.23					

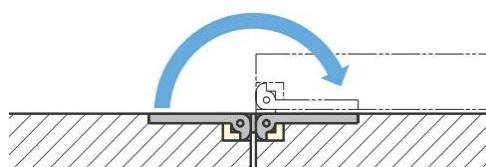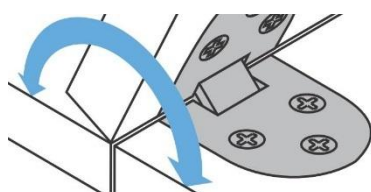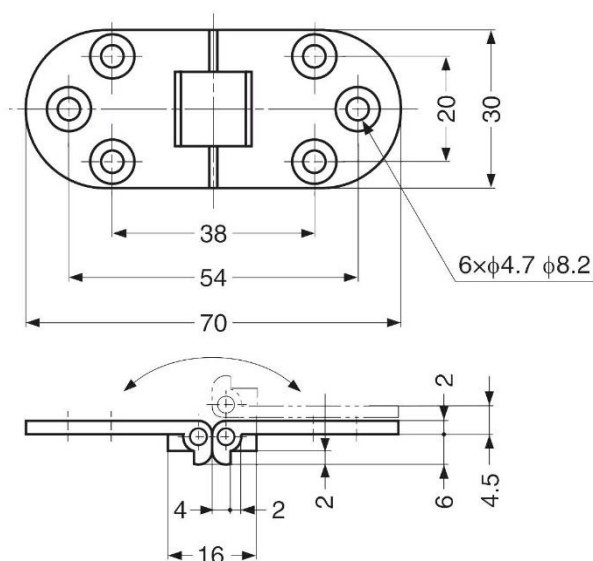

Hinges

Art. Nr.: 150. MH-40 (perforated and countersunk)

Double pivot hinge allows 180° opening

150.MH-40CR



150.MH-40M



150.MH-40WB



Article no.			Door width	Door height	Door Thickness	Load capacity N / Pair	Weight (g)
Series	Execution	Material Brass					
150. MH-40	M (Polished)	.22	Max. 450	Max. 700	Max. 21	29	64
150. MH-40	WB (White Bronze plating)	.25					
150. MH-40	CR (Chrom)	.23					

